



# REVERSIBLE AXIS



Air flow in direction A or B

We can meet your needs with 100% reversible solutions or a reversible mounting with blades in direction A-B.


## Fully reversible blades



## Reversible by alternating the blades

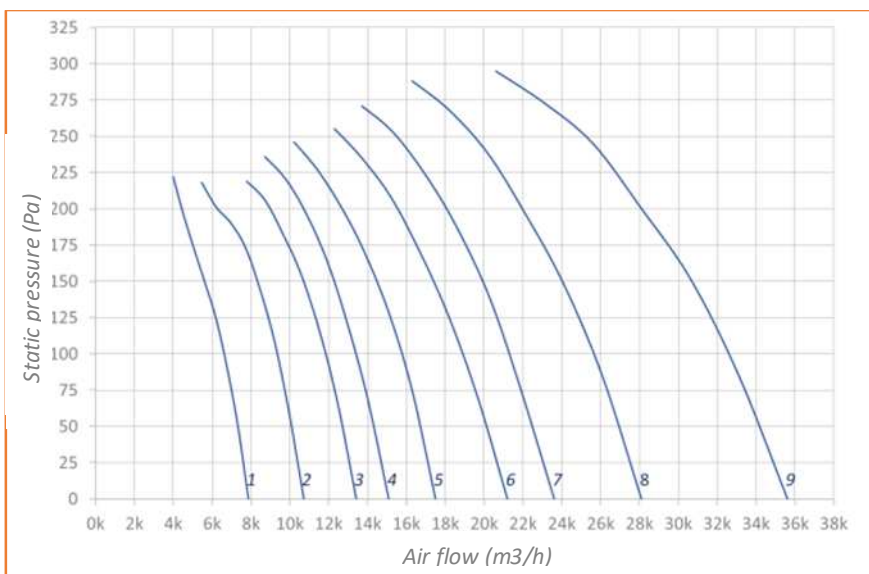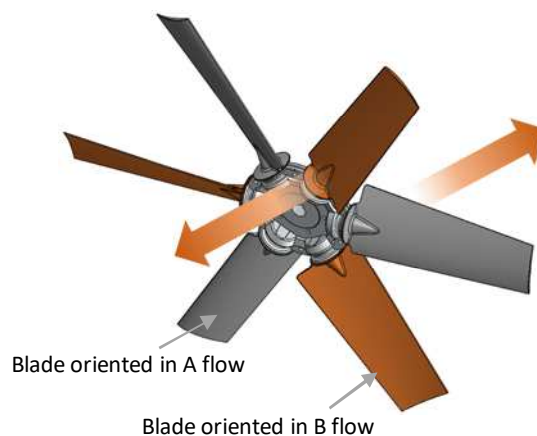

Curve No.	Ø mm	Power kW	Current A
1	630	0.75	1.9
2	630	1.10	2.6
3	630	1.50	3.4
4	710	1.50	3.4
5	710	2.20	4.6
6	710	3.00	6.3
7	800	3.00	6.3
8	800	4.00	7.9
9	800	5.50	11.1

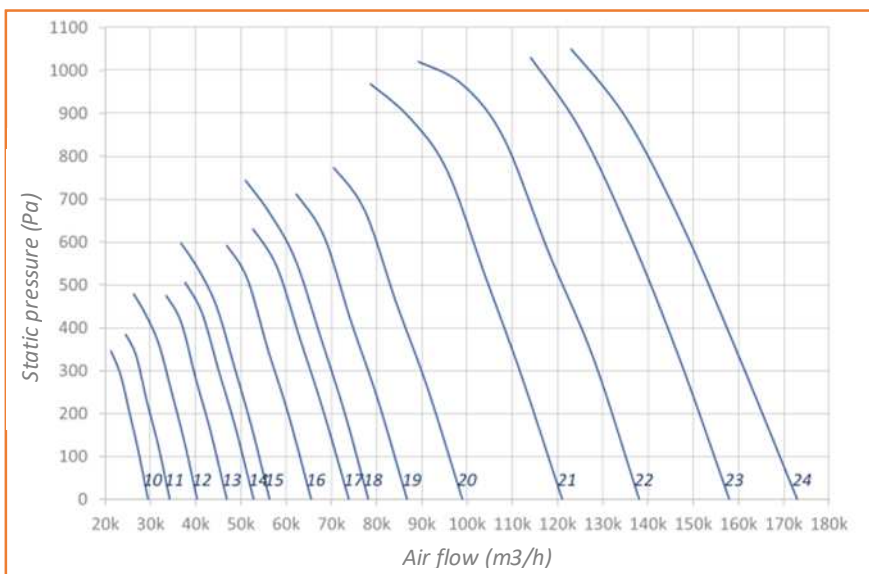

Curve No.	Ø mm	Power kW	Current A
10	900	4.00	7.9
11	900	5.50	11.1
12	1000	5.50	11.1
13	1000	7.50	14.3
14	1000	9.20	17.8
15	1120	11.00	22.7
16	1120	15.00	30.0
17	1120	18.50	36.0
18	1250	18.50	36.0
19	1250	22.00	43.5
20	1250	30.00	55.0
21	1400	45.00	85.5
22	1400	55.00	105.5
23	1400	75.00	143.0
24	1400	90.00	169.0

**Notes:**  
The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization.  
The curves represent just a very small part of air flow possibilities.