






AXUS BOLT-ON GUIDE VANE

Outlet guide vane

Range available from 500mm to 1400mm:

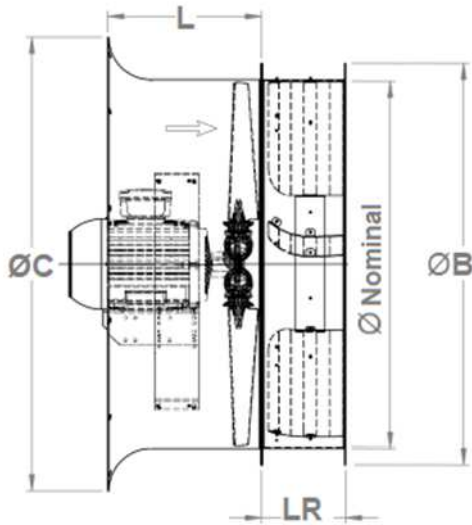

Nominal $\varnothing$ mm	B mm	C mm	L mm	LR mm
500	572	685	425	150
560	626	715	425	150
630	704	790	500	150
710	780	900	500	150
800	885	1000	565	185
900	990	1100	565	185
1000	1090	1230	675	215
1120	1230	1360	1110	215
1250	1375	1520	1110	254
1400	1530	1600	1110	254

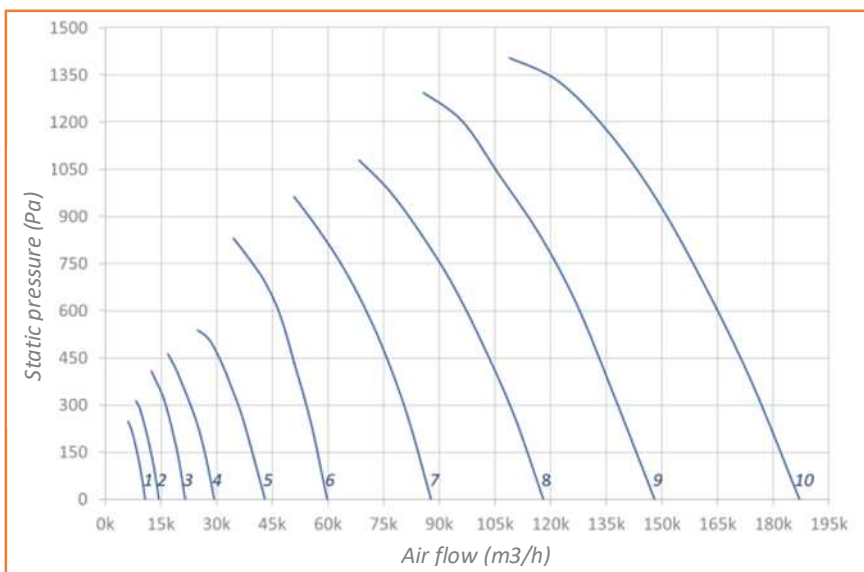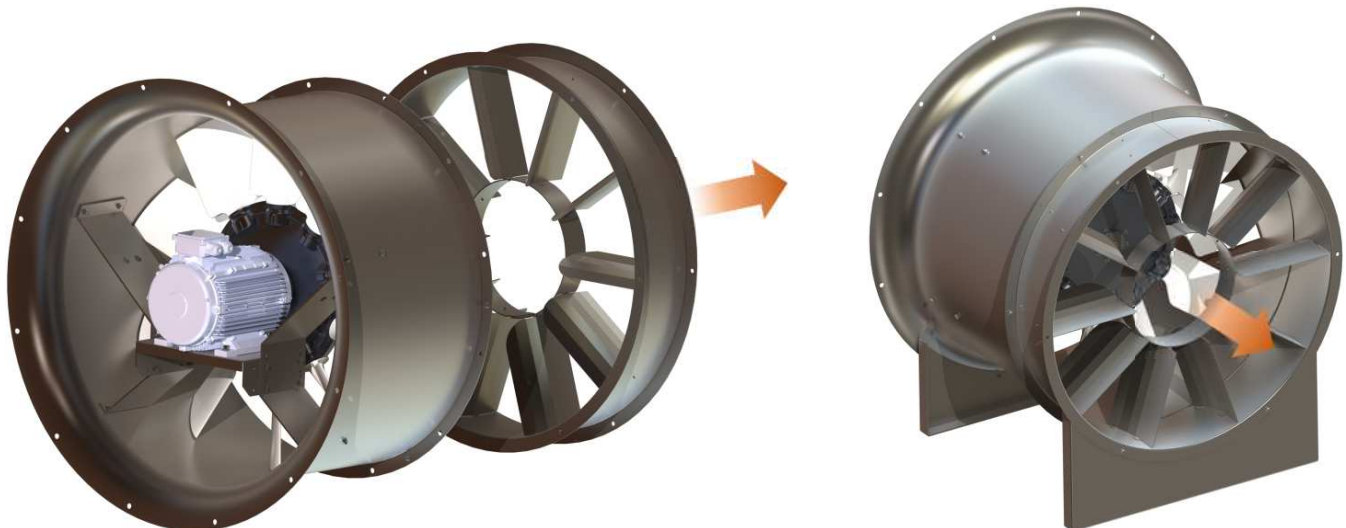

Curve No.	$\varnothing$ mm	Power kW	Current A
1	500	1.10	2.6
2	560	1.50	3.4
3	630	3.00	6.3
4	710	4.00	7.9
5	800	7.50	14.3
6	900	18.50	36.0
7	1000	30.00	55.0
8	1120	45.00	85.5
9	1250	55.00	105.5
10	1400	90.00	169.0

Notes:

The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization.
The curves represent just a very small part of air flow possibilities.