



AXUS PERFORMANCES: 4 Poles (1500 rpm)


Common operating range

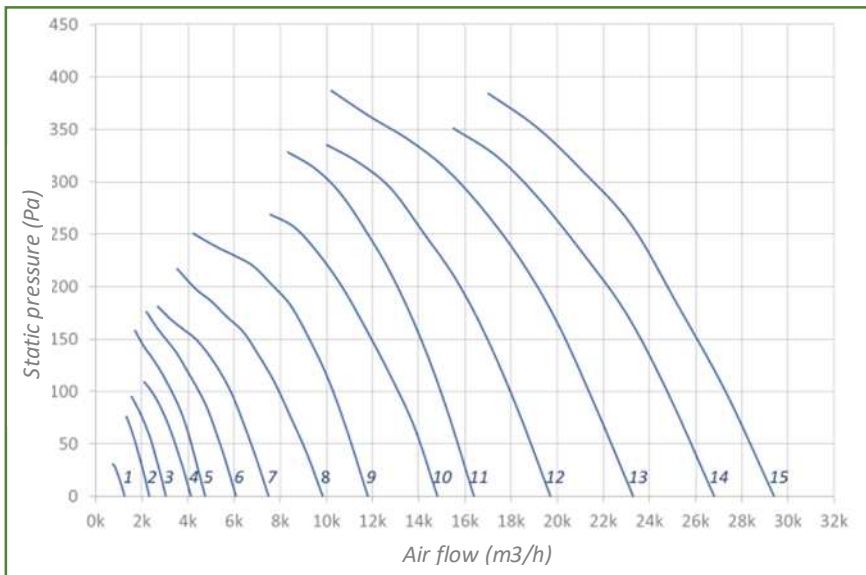

Curve No.	Ø mm	Power kW	Current A
1	250	0.09	0.3
2	315	0.09	0.3
3	350	0.09	0.3
4	400	0.12	0.4
5	450	0.18	0.5
6	500	0.25	0.7
7	500	0.37	1.1
8	560	0.55	1.5
9	560	0.75	1.9
10	630	1.10	2.6
11	630	1.50	3.4
12	630	2.20	4.6
13	700	2.20	4.6
14	700	3.00	6.3
15	800	3.00	6.3

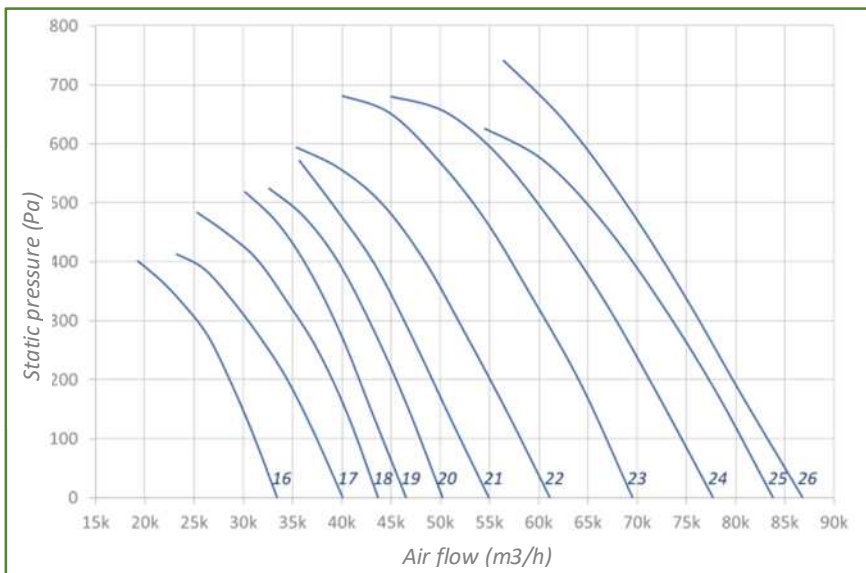

Curve No.	Ø mm	Power kW	Current A
16	800	4.00	8.2
17	800	5.50	11.1
18	800	7.50	14.3
19	900	7.50	14.3
20	900	9.50	17.8
21	900	11.00	20.7
22	900	15.00	27.7
23	1000	15.00	27.7
24	1000	18.50	35.4
25	1000	22.00	42.2
26	1000	30.00	53.8

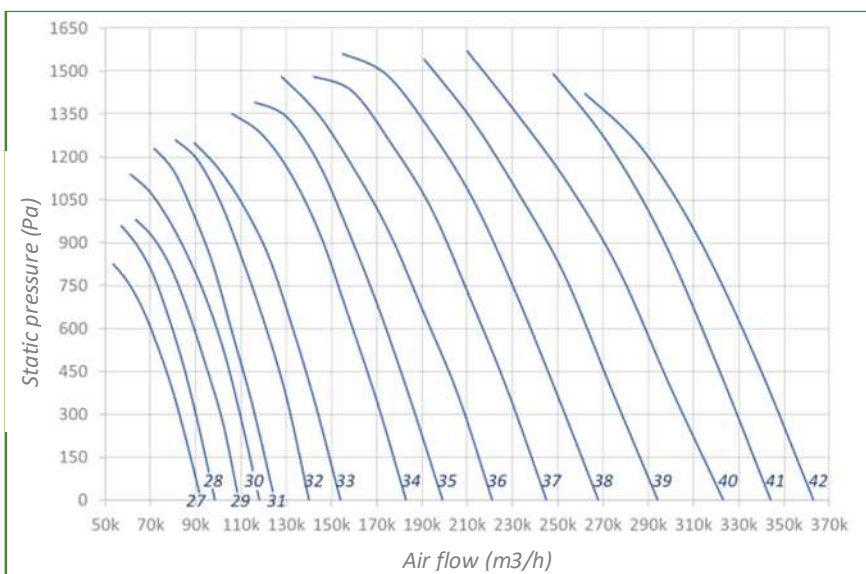


Curve No.	Ø mm	Power kW	Current A
27	1120	22.00	42.2
28	1120	30.00	53.8
29	1120	37.00	66.4
30	1250	30.00	53.8
31	1250	45.00	81.3
32	1250	55.00	97.6
33	1400	55.00	97.6
34	1400	75.00	131.2
35	1400	90.00	160.5
36	1600	90.00	160.5
37	1600	110.00	189.3
38	1600	132.00	226.5
39	1600	160.00	267.8
40	1600	200.00	334.8
41	1600	250.00	448.4
42	1600	315.00	558.3

Notes:


The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization. The curves represent just a very small part of air flow possibilities.

AXUS PERFORMANCES: 6 Poles (1000 rpm)


Common operating range

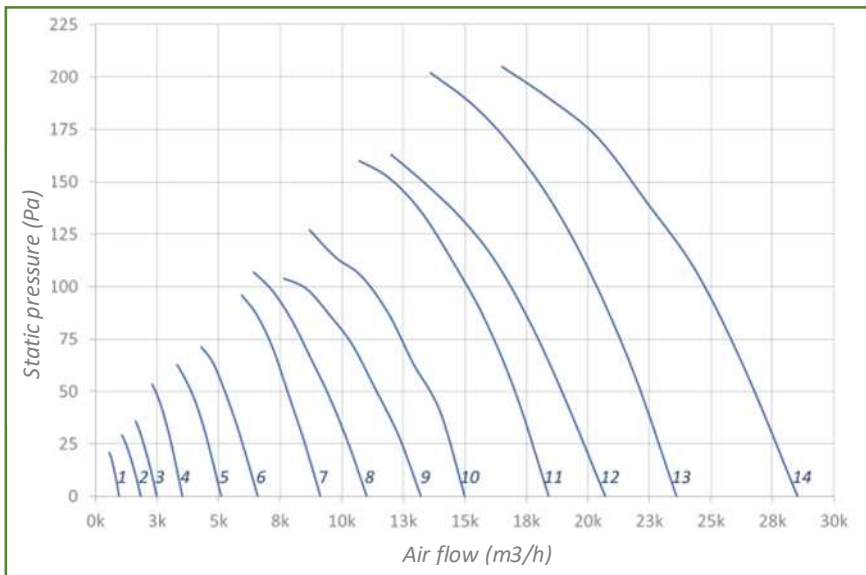

Curve No.	Ø mm	Power kW	Current A
1	250	0.09	0.5
2	315	0.09	0.5
3	350	0.09	0.5
4	400	0.12	0.6
5	450	0.18	0.7
6	500	0.25	0.8
7	560	0.37	1.1
8	630	0.37	1.1
9	630	0.55	1.5
10	630	0.75	2.1
11	710	1.10	2.6
12	800	1.10	2.6
13	800	1.50	3.9
14	800	2.20	5.2

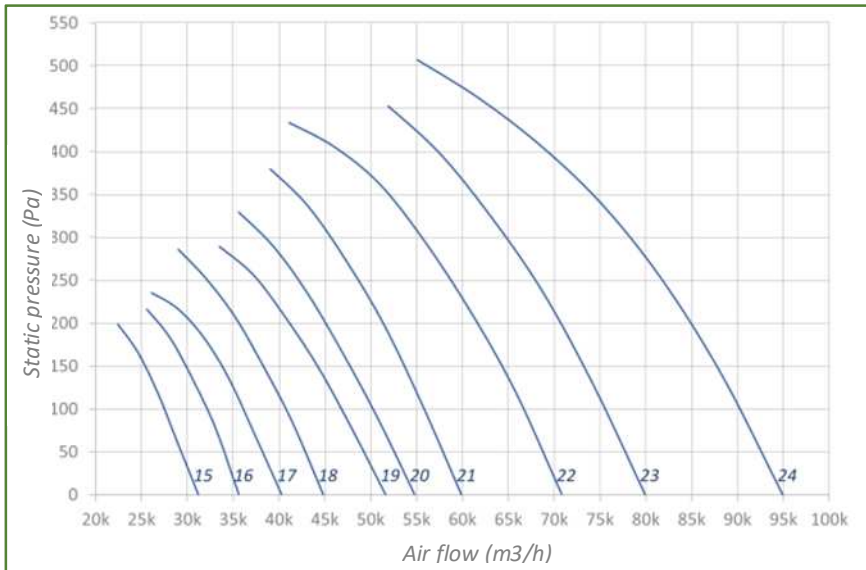

Curve No.	Ø mm	Power kW	Current A
15	900	2.20	5.2
16	900	3.00	7.3
17	900	4.00	9.1
18	1000	4.00	9.1
19	1000	5.50	12.7
20	1000	7.50	16.9
21	1120	9.20	19.1
22	1120	11.00	22.5
23	1120	15.00	28.6
24	1250	18.50	36.4

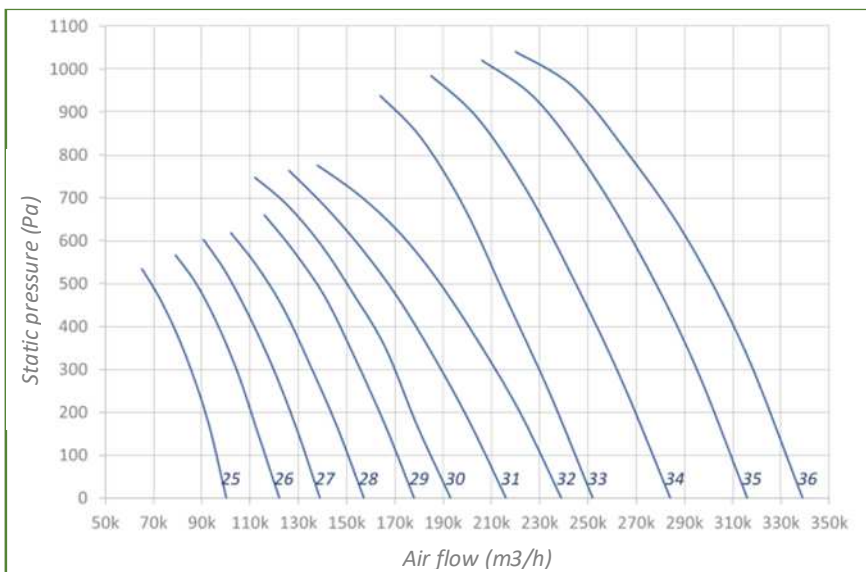


Curve No.	Ø mm	Power kW	Current A
25	1250	22.00	43.1
26	1400	22.00	43.1
27	1400	30.00	53.1
28	1600	30.00	53.1
29	1600	37.00	67.3
30	1600	45.00	83.5
31	1800	45.00	83.5
32	1800	55.00	99.3
33	2000	75.00	139.6
34	2000	90.00	166.9
35	2000	110.00	203.6
36	2000	132.00	243.6

Notes:


The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization. The curves represent just a very small part of air flow possibilities.

AXUS PERFORMANCES: 2 Poles (3000 rpm)


Common operating range

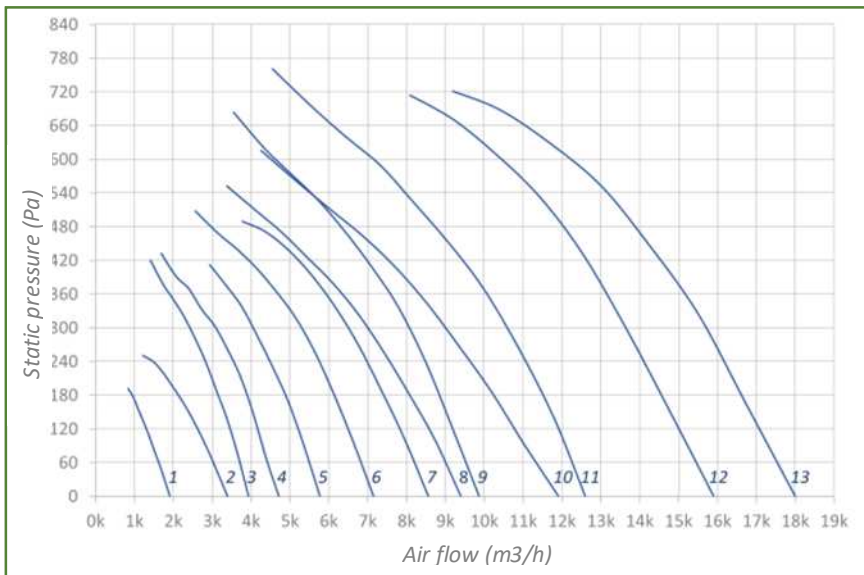

Curve No.	Ø mm	Power kW	Current A
1	250	0.12	0.4
2	315	0.18	0.5
3	350	0.37	0.9
4	350	0.55	1.3
5	350	0.75	1.6
6	400	0.75	1.6
7	400	1.10	2.3
8	450	1.10	2.3
9	450	1.50	3.2
10	500	1.50	3.2
11	500	2.20	4.5
12	500	3.00	6.2
13	500	4.00	7.3

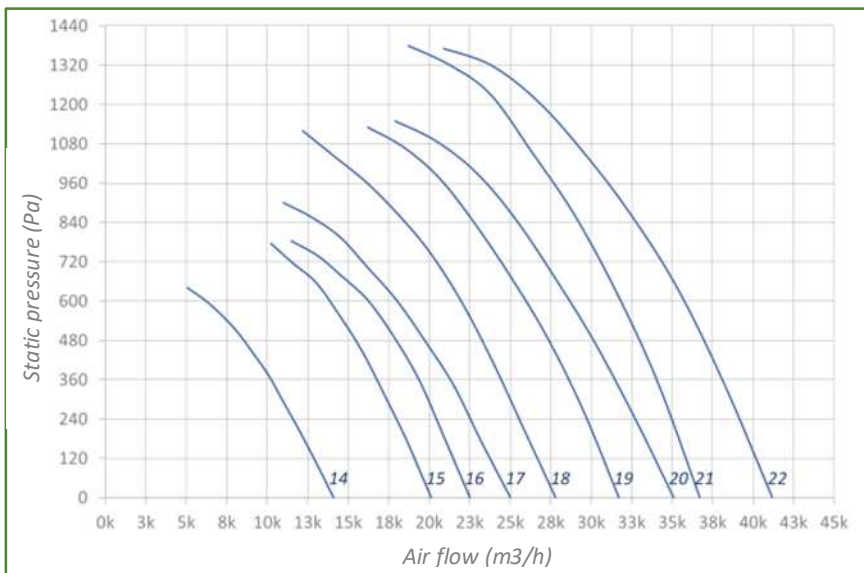

Curve No.	Ø mm	Power kW	Current A
14	560	2.20	4.5
15	560	4.00	7.3
16	560	5.50	9.8
17	630	5.50	9.8
18	630	7.50	13.4
19	630	9.20	16.1
20	630	11.00	18.9
21	630	15.00	26.2
22	630	18.50	31.8

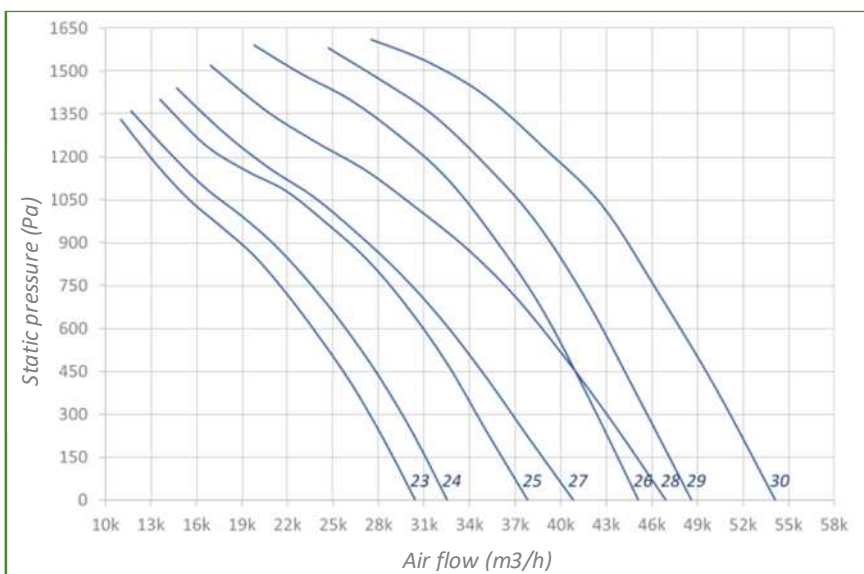

Curve No.	Ø mm	Power kW	Current A
23	710	7.50	13.4
24	710	9.20	16.1
25	710	11.00	18.9
26	710	18.50	31.8
27	800	11.00	18.9
28	800	15.00	26.2
29	800	18.50	31.8
30	800	22.00	37.6

Notes:

The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization. The curves represent just a very small part of air flow possibilities.