

TMD – FORWARD CURVED BLADES: DOUBLE INLET

Incorporated motor

These fans work in direct coupling and the non-ventilated motor is positioned in the impeller and benefits from a good level of cooling. The fluid temperature and the ambient air must, however, remain below 50°C.


The motors that fit this range are single-phase 4 or 6 poles as standard up to size 9/9 and can optionally be three phases 6 poles up to size 15/15.

Standard construction:

- Casing made by spot welding and impellers made from Z275 steel.
- Impeller with stapled blades and G6.3 balanced according to ISO 1940
- Temperature -20 to +45°C

Option:

- Epoxy paint
- Set of feet for sizes 7/7 to 15/15

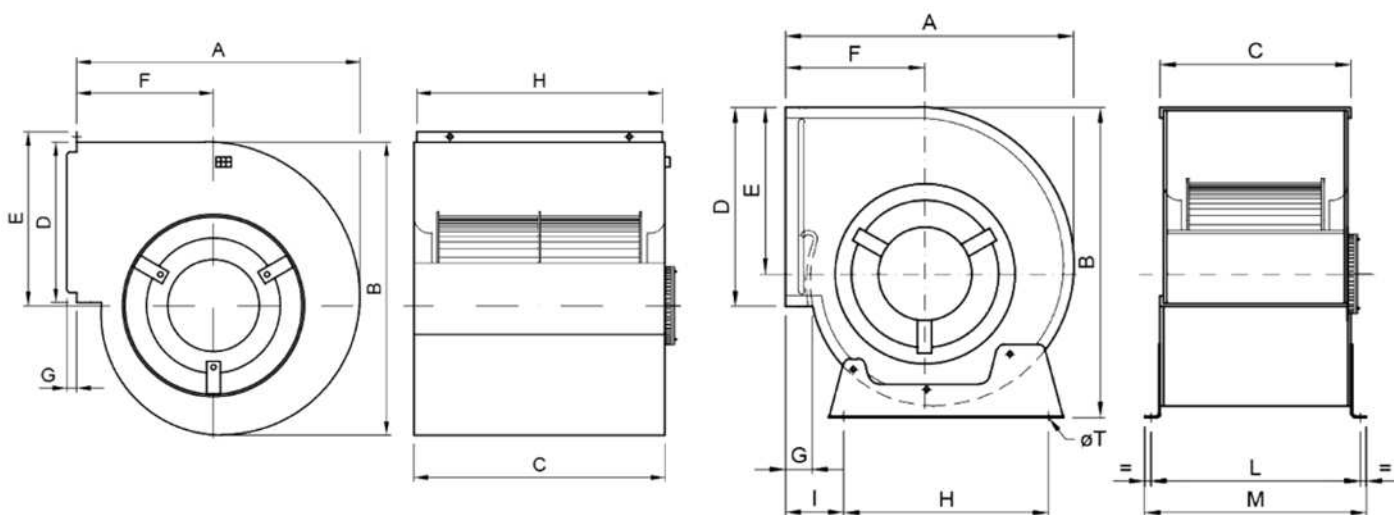

TMD ./.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	L mm	M mm	ØT mm
5/8	198	202	255	100	123	100	5	253	-	-	-	-
7/7	307	326	232	208	180	146	27	228	55	258	280	10x15
9/7	375	400	249	265	218	180	33	280	75	273	292	10x15
9/9	375	400	298	265	218	180	33	280	75	324	342	10x15
10/8	427	452	274	290	245	207	38	317	80	296	316	10x15
10/10	427	452	326	290	245	207	38	317	80	348	370	10x15
12/9	498	530	309	341	292	236	38	400	82	330	355	10x16
12/12	498	530	386	341	292	236	38	400	82	406	430	10x16
15/15	578	622	473	402	343	271	38	460	91	500	527	12x20

TMD PERFORMANCES

Incorporated motor

TMD ./.	No. of poles	Inst. P kW	Nb. Sp. xV	Mot. V rpm	1x 230V I _{max.} A	3x 230V I _{max.} A	3x 400V I _{max.} A	Max. Flow m ³ /h	Max. Pt. Pa	Weight kg
5/8	4	0.04	1V	1200	0.4	-	-	550	130	2.5
7/7	4	0.15	1V	1230	1.4	-	-	1700	260	8.2
7/7	4	0.15	3V	1230	1.5	-	-	1700	260	8.2
7/7	4	0.37	1V	1320	3.3	-	-	2400	270	11.2
9/7	4	0.37	1V	1320	3.3	-	-	2600	440	13.5
9/7	4	0.55	1V	1310	4.5	-	-	3200	450	14.8
9/7	4	0.55	3V	1310	4.0	-	-	3200	450	14.8
9/9	4	0.37	1V	1320	3.3	-	-	2750	400	14.1
9/9	4	0.55	1V	1310	4.5	-	-	3400	440	15.4
9/9	4	0.55	3V	1310	4.0	-	-	3400	440	15.4
10/8	4	0.37	1V	1320	3.3	-	-	2500	490	14.9
10/8	4	0.55	1V	1310	4.5	-	-	3100	520	16.2
10/8	4	0.55	3V	1310	4.0	-	-	3100	520	16.2
10/10	4	0.37	1V	1320	3.3	-	-	2450	510	15.5
10/10	4	0.55	1V	1310	4.5	-	-	3170	490	16.8
10/10	4	0.55	3V	1310	4.0	-	-	3170	490	16.6
7/7	6	0.08	1V	820	0.85	-	-	1490	120	7.8
9/7	6	0.15	1V	850	1.5	-	-	2200	200	11.6
9/7	6	0.25	1V	830	2.2	-	-	2800	200	13.4
9/9	6	0.15	1V	850	1.5	-	-	2400	200	12.2
9/9	6	0.25	1V	830	2.2	-	-	3100	190	14.0
10/8	6	0.25	1V	830	2.2	-	-	2900	250	14.8
10/8	6	0.37	1V	880	2.7	-	-	3250	250	25.9
10/10	6	0.25	1V	830	2.2	-	-	2900	240	15.4
10/10	6	0.37	1V	880	2.7	-	-	3900	250	16.5
10/10	6	0.55	1V	840	4.5	-	-	4200	250	18.4
10/10	6	0.55	3V	840	4.1	-	-	4200	250	18.4
12/9	6	0.55	1V	850	5.0	-	-	5150	330	20.6
12/9	6	0.55	3V	850	5.0	-	-	5150	330	20.4
12/9	6	0.75	1V	850	6.0	-	-	5750	330	21.7
12/9	6	0.75	3V	850	6.0	-	-	5750	330	21.7
12/9	6	1.10	1V	880	7.3	-	-	5500	350	26.1
12/12	6	0.55	1V	850	5.0	-	-	5300	310	21.9
12/12	6	0.55	3V	850	5.0	-	-	5300	310	21.7
12/12	6	0.75	1V	850	6.0	-	-	6000	290	23.0
12/12	6	0.75	3V	850	6.0	-	-	6000	290	23.0
12/12	6	1.10	1V	880	7.3	-	-	6300	330	27.4
10/10	6	0.75	1V	920	-	4.0	2.4	4500	250	18.2
12/9	6	0.75	1V	880	-	4.0	2.4	4900	340	20.6
12/9	6	1.10	1V	850	-	6.6	3.8	6150	360	21.9
12/12	6	0.75	1V	880	-	4.0	2.4	5300	320	21.9
12/12	6	1.10	1V	850	-	6.6	3.8	7000	340	23.2
15/15	6	2.20	1V	890	-	10.9	6.3	10000	460	40.8

Notes:


The current is indicated for a 50Hz electricity network.

The speeds are indicated for impellers made from galvanized steel.

For ancillaries / standard or specific installations, please consult the sales team.



Outlet flange



Inlet safety guard



Support feet



Variable speed drive