




R / G / V / Z SERIES – BACKWARD CURVED BLADES

Common operating range

Series R, G, V, Z are certified to work in hazardous environments. **The definition of Zone and temperature Class is the user's responsibility; AREM shall not be held responsible for an inaccurate definition. See STANDARDS – RULES – CONVENTIONS tab.**

Classification of hazardous ZONES:

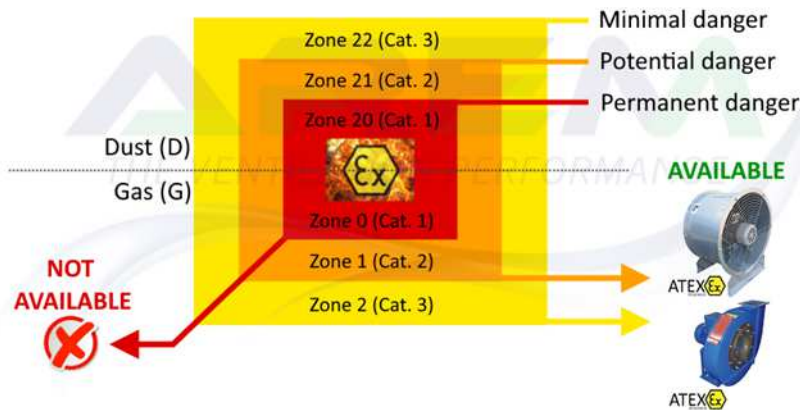


The impeller's direction of rotation and the position of the motor are restrictive points that are difficult to modify after installation. These parameters generally have little impact on manufacturing costs (with the exception of frame-mounted operation or specific belt-drives), but must be correctly defined when the order is made.

Series G, R: low - medium pressure



Series V, Z: high pressure

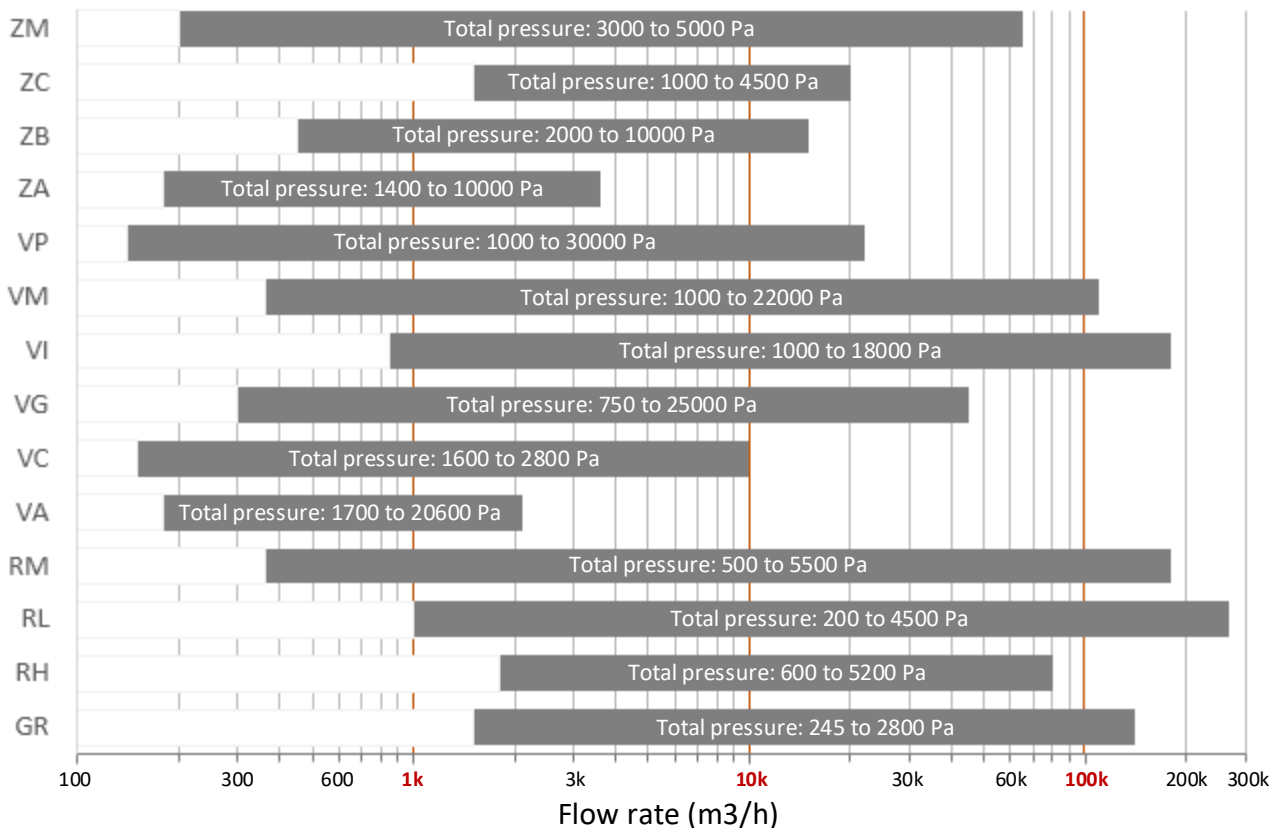

See details in the **INDUSTRIAL VENTILATION tab** of the catalog.