





AXUS PERFORMANCES: 4 Poles (1500 rpm)


Common operating range

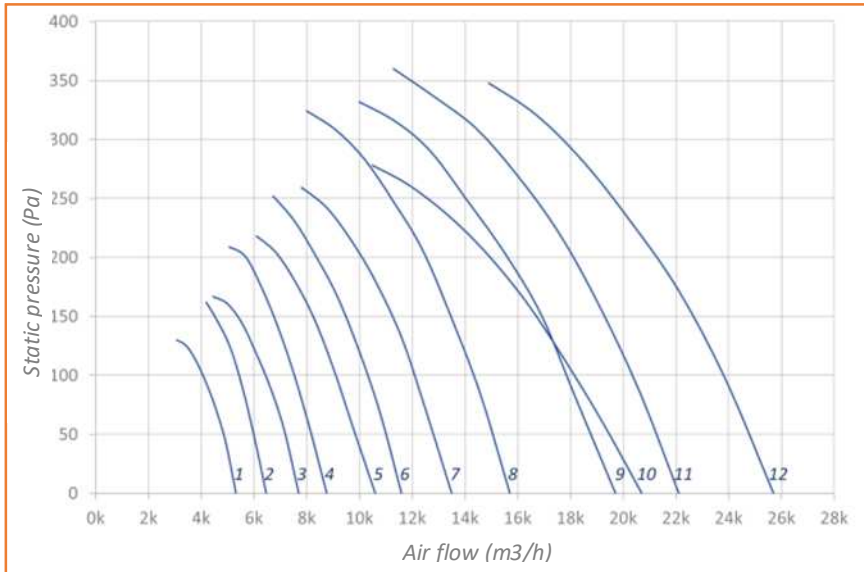

Curve No.	Ø mm	Power kW	Current A
1	400	0.55	1.5
2	450	0.55	1.5
3	450	0.75	1.9
4	500	0.75	1.9
5	500	1.10	2.6
6	560	1.10	2.6
7	560	1.50	3.4
8	630	1.50	3.4
9	630	2.20	4.6
10	710	1.50	3.4
11	710	2.20	4.6
12	710	3.00	6.3

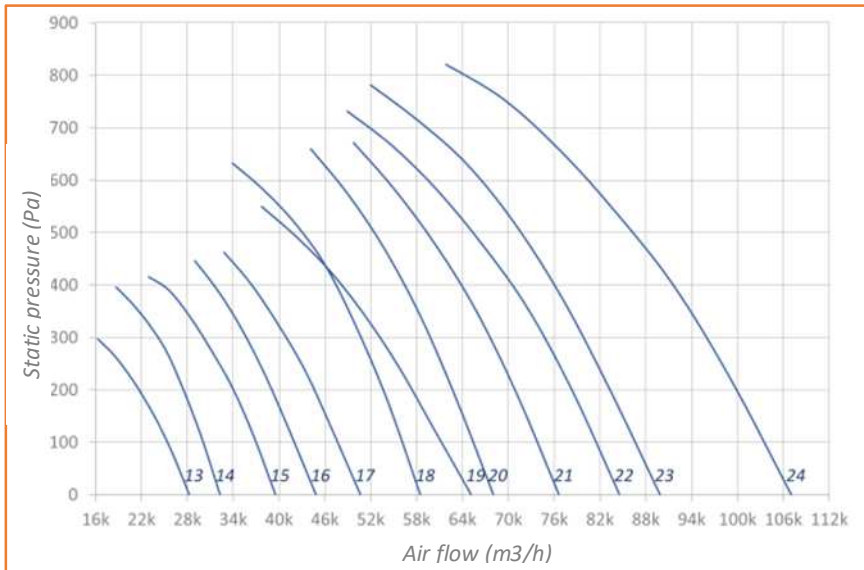

Curve No.	Ø mm	Power kW	Current A
13	800	2.20	4.6
14	800	4.00	7.9
15	800	5.50	11.1
16	900	7.50	14.3
17	900	9.20	17.8
18	900	15.00	30.0
19	1000	11.00	22.7
20	1000	15.00	30.0
21	1000	18.50	36.0
22	1000	22.00	43.5
23	1120	22.00	43.5
24	1120	30.00	55.0

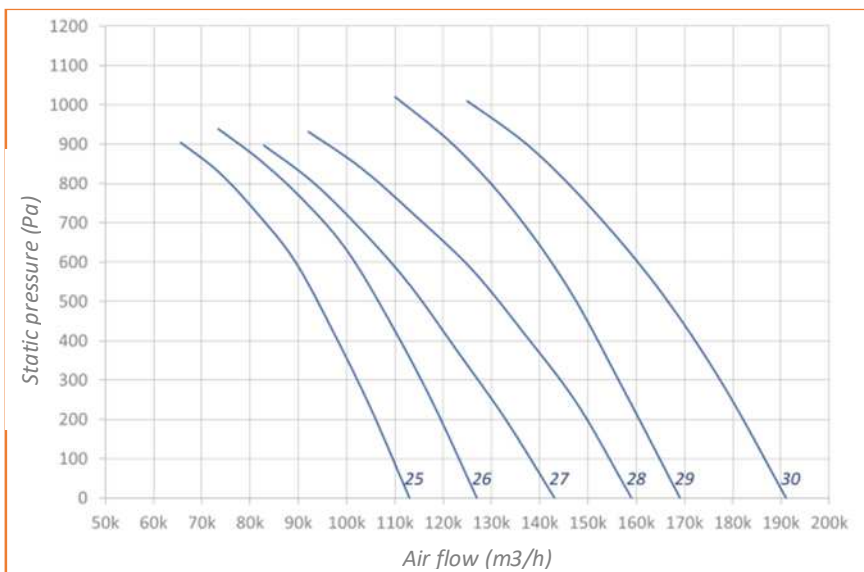

Curve No.	Ø mm	Power kW	Current A
25	1250	30.00	55.0
26	1250	37.00	71.0
27	1400	45.00	85.5
28	1400	55.00	105.5
29	1400	75.00	143.0
30	1400	90.00	169.0


Notes:

The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization.
The curves represent just a very small part of air flow possibilities.




AXUS PERFORMANCES: 6 Poles (1000 rpm)


Common operating range

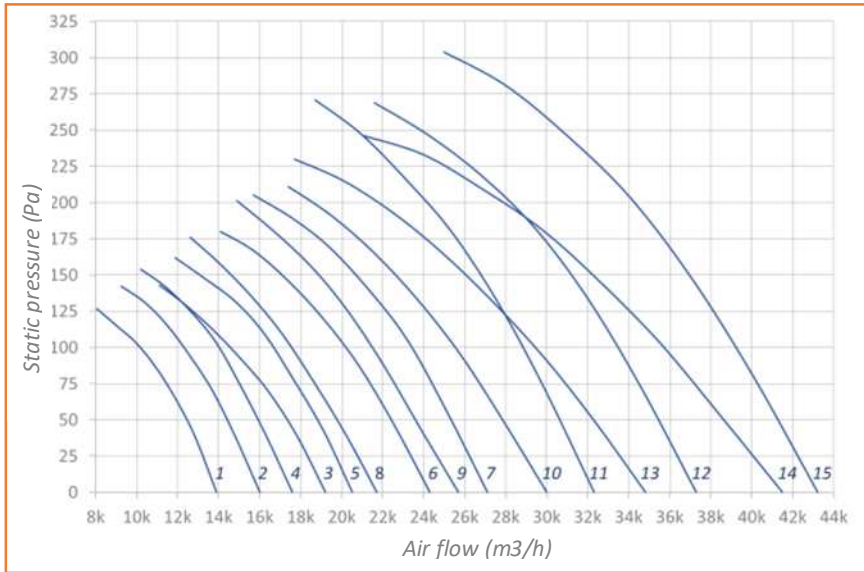

Curve No.	Ø mm	Power kW	Current A
1	630	0.75	2.1
2	710	0.75	2.1
3	710	1.10	2.6
4	800	0.75	2.1
5	800	1.10	2.6
6	800	1.50	3.9
7	800	2.20	5.2
8	900	1.10	2.9
9	900	1.50	3.9
10	900	2.20	5.2
11	900	3.00	7.3
12	900	4.00	8.9
13	1000	2.20	5.2
14	1000	3.00	7.3
15	1000	4.00	9.1

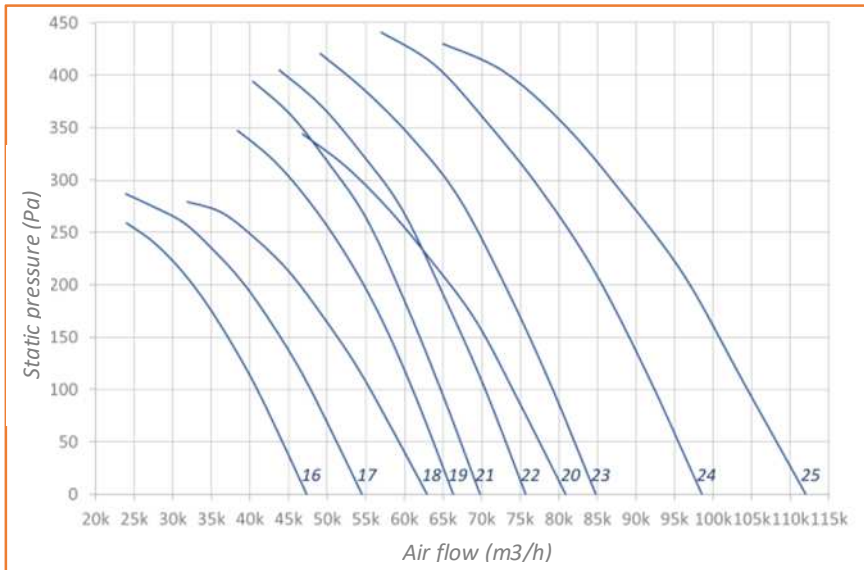

Curve No.	Ø mm	Power kW	Current A
16	1120	3.00	7.3
17	1120	4.00	9.1
18	1120	5.50	12.7
19	1120	7.50	16.9
20	1120	11.00	22.5
21	1250	7.50	16.9
22	1250	9.20	19.1
23	1250	11.00	22.5
24	1250	15.00	28.6
25	1250	18.50	36.4

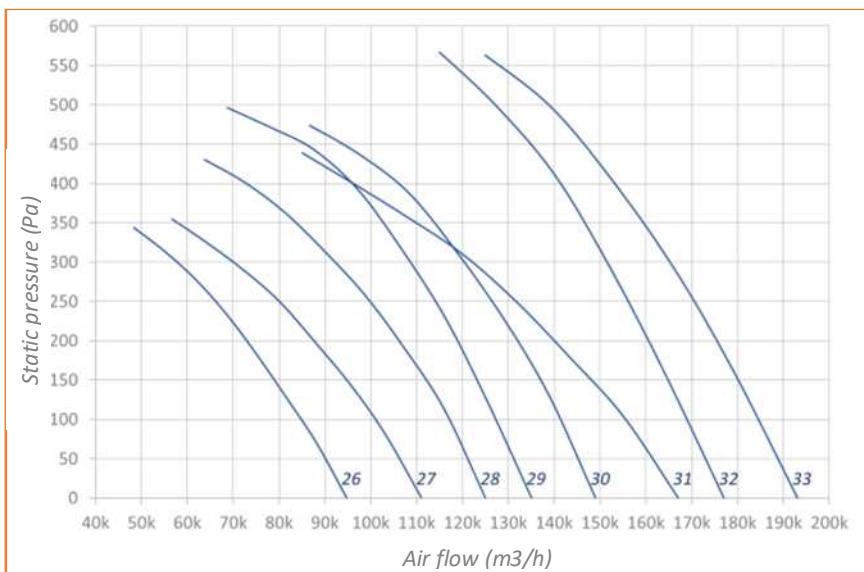

Curve No.	Ø mm	Power kW	Current A
26	1400	11.00	22.5
27	1400	15.00	28.6
28	1400	22.00	43.1
29	1400	30.00	53.1
30	1400	37.00	67.3
31	1600	30.00	53.1
32	1600	45.00	83.5
33	1600	55.00	99.3


Notes:

The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization.
The curves represent just a very small part of air flow possibilities.




AXUS PERFORMANCES: 2 Poles (3000 rpm)


Common operating range

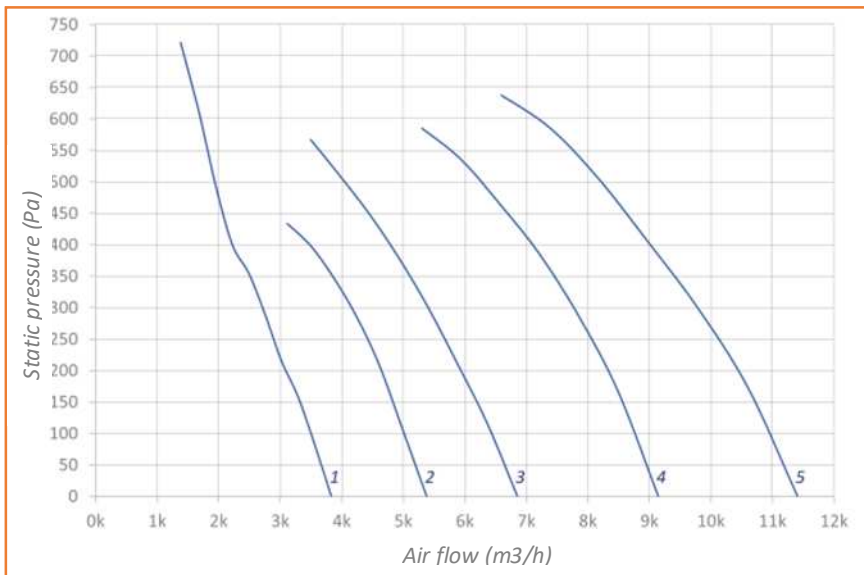

Curve No.	Ø mm	Power kW	Current A
1	400	0.75	1.6
2	400	1.10	2.3
3	450	1.50	3.2
4	450	2.20	4.5
5	450	3.00	6.2

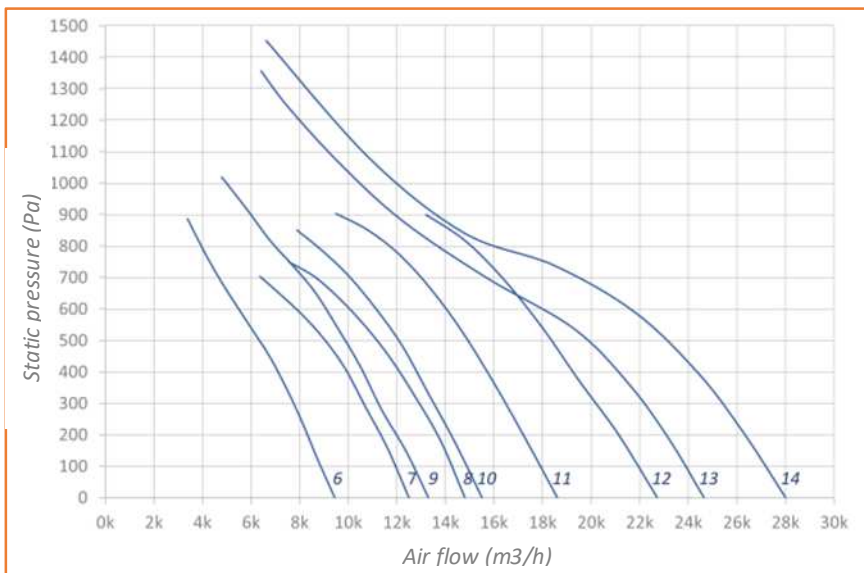

Curve No.	Ø mm	Power kW	Current A
6	500	2.20	4.5
7	500	3.00	6.2
8	500	4.00	7.3
9	560	3.00	6.2
10	560	4.00	7.3
11	560	5.50	9.8
12	560	7.50	13.4
13	630	9.20	17.6
14	630	11.00	21.0

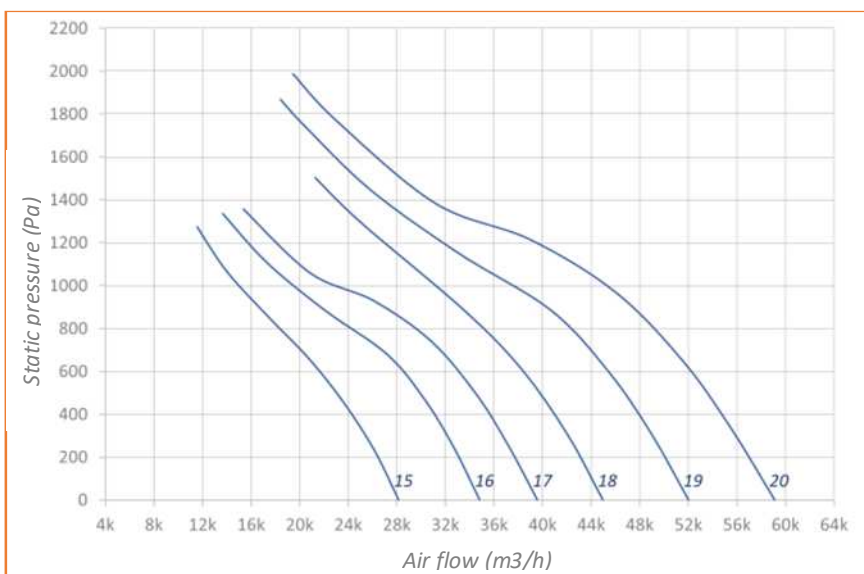

Curve No.	Ø mm	Power kW	Current A
15	710	11.00	21.0
16	710	15.00	29.0
17	710	18.50	34.4
18	800	22.00	40.0
19	800	30.00	54.5
20	800	37.00	68.0

Notes:

The current is indicated for a 400V/50Hz electricity network, variable depending on the motorization.
The curves represent just a very small part of air flow possibilities.